

YS200 SERIES



Input: 100-265VAC 50/60Hz
Output Voltage: 5V-36V DC
Rated Power: 200W max

Features



- Universal AC input/full range
- No load power consumption <1.0W
- Constant current and voltage(CC,CV mode)
- Protections: Short circuit / Overload / Over voltage / Over temp
- LED indicate for charging status
- Fully enclosed plastic case
- High reliability

Application

- Moped
- Balance car
- Electrocar



■ Dimensions and Installation

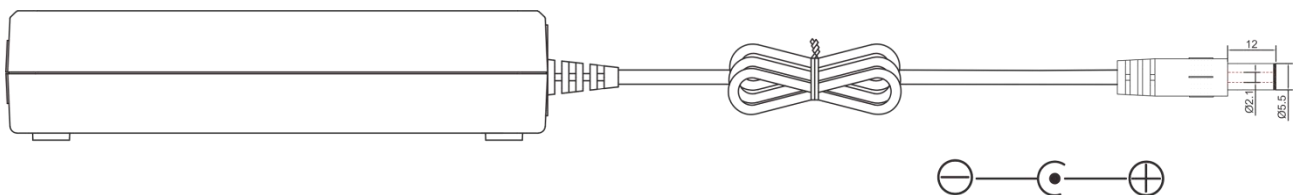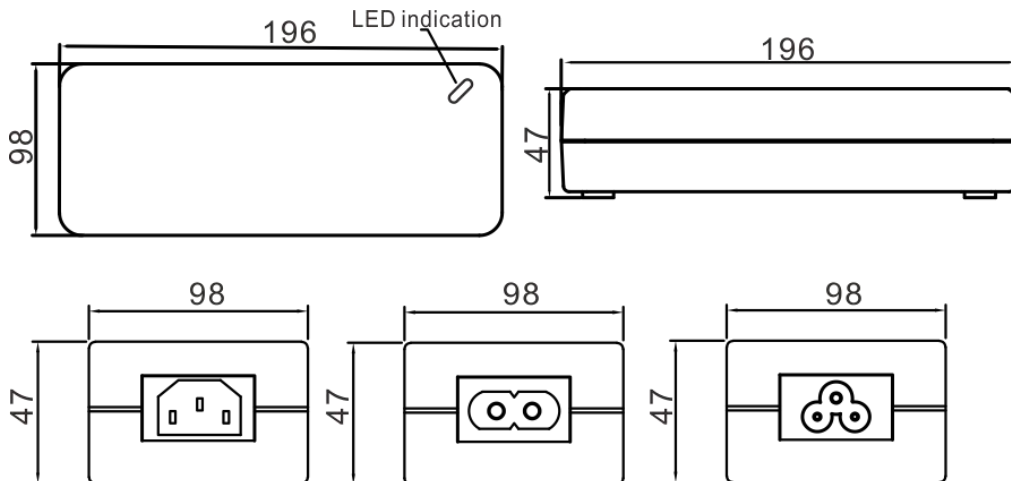


YS200 SERIES


MODEL DETAIL SPEC.		YS200-6720290	YS200-5460360	YS200-4200470	YS200-2940680	YS200-2100900	YS200-6720290
INPUT	Input Voltage:	85-265VAC					
	Input Frequency:	50/60Hz					
	Inrush Current:	40A/115VAC 60A/230VAC					
	AC Current:	2.5A max.					
	Leakage Current:	< 0.25mA/240VAC					
OUTPUT	DC Voltage:	67.2V	54.60V	42.00V	29.40V	21.00V	67.2V
	Rated Current:	2.90A	3.60A	4.70A	6.80A	9.00A	2.90A
	Rated Power:	195.00W	196.56W	197.40W	199.92W	189.00W	195.00W
	Voltage Tolerance:	±5.0%	±5.0%	±5.0%	±5.0%	±5.0%	±5.0%
	Ripple and Noise:	600mVp-p	500mVp-p	400mVp-p	294mVp-p	210mVp-p	600mVp-p
	Line Regulation:	±3%					
	Load Regulation:	±5%	±5%	±5%	±5%	±5%	±5%
	Setup, Rise, Hold Up time:	500ms, 30ms/120ms 230VAC 1000ms, 30ms/25ms 115VAC at full load					
ENVIRONMENTAL	Operating Temperature:	-20 ~ +60 (Refer to "Derating Curve")					
	Storage Temp:	-40°C ~ 85°C					
	Storage Humidity:	10 ~ 95% RH					
	Working Humidity:	20 ~ 95% RH non-condensing					
PROTECTION	Over Load:	Above 105% rated output power Protection type: Hiccup mode, recovers automatically after fault condition is removed					
	Over Voltage:	≤Vout*150% Protection type: Shut down o/p voltage, re-power on to recover					
	Over Temperature:	When the NTC resistance temperature is between 85°C and 100°C ,The power supply shall be protected and no deformation and no discoloration on case					
	Safety Regulations:	UL62368-1 , UL1012 , EN62368-1 , EN60335-1 , EN60335-2-29(except for 55.2V) approved					
SAFETY & EMC	Withstand Voltage:	I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC					
	Isolation Resistance:	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C/ 70% RH					
	EMC Emission:	Compliance to BS EN/EN55032 (CISPR32), BS EN/EN61204-3 Class B, BS EN/EN61000-3-2,-3, EAC TP TC 020, CNS13438 Class B					
	EMC Immunity:	EN55032 class B, EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3					
OTHER	MTBF:	500Khrs min. MIL-HDBK-217F(25°C)					
	Size:	217*77*55mm					
	Weight:	995g / pc					
	Packaging:	20PCS/CTN					

YS200 SERIES

Deduction curve and temperature

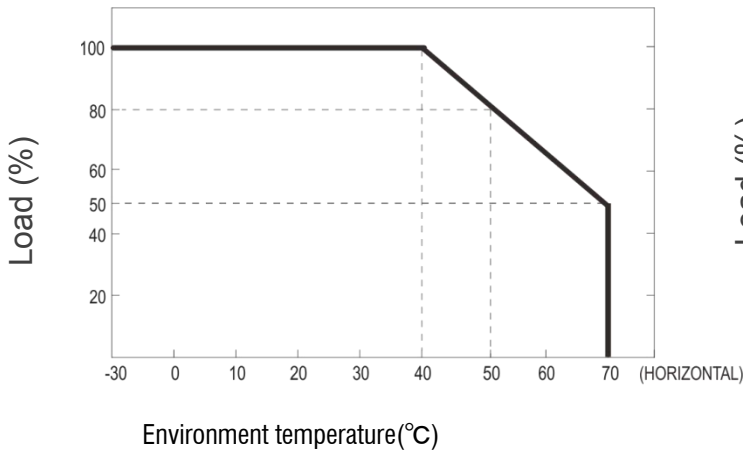

Minus output and input voltage curves

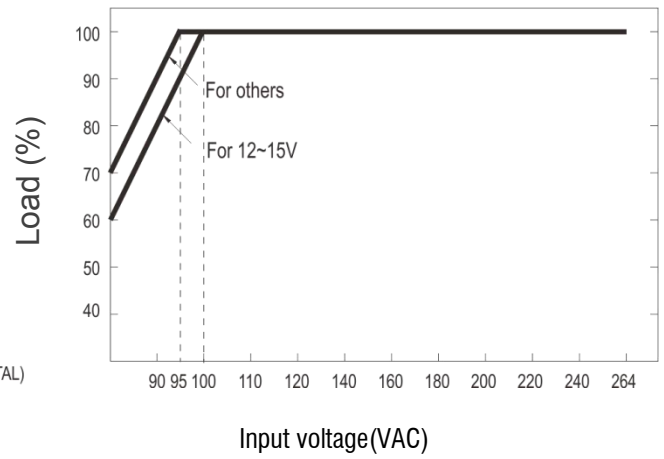

Functional Diagram

Standard plug: P1J

P1J	Pin Assignment
	<p>Outside Inside</p> <p>-V not connected to AC FG (standard)</p> <p>-V connected to AC FG (optional)</p>











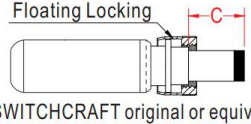






DC plug changeable through:

- (1) Customization of the standard part with an optional DC plug according to the table (MOQ applicable)
 - (2) Quick adapter accessory (sold separately without MOQ)
- Please refer to below table and online selection guide :

Example quick adapter accessory:






YS200 SERIES

Optional DC plug: (Available in customized cable or quick adapter)

Tuning Fork Style		Type No.	A	B	C	Quick Adapter Accessory	
			OD	ID	L		
   <p>(Straight)</p>  <p>(Right-angled)</p>	P1I	5.5	2.1	9.5	Available (Current rating: 7.5A max.)		
	P1L	5.5	2.5	9.5			
	P1M	5.5	2.1	11.0			
	P1IR	5.5	2.5	9.5			
	P1JR	5.5	2.1	11.0			
	P1LR	5.5	2.5	9.5			
	P1MR	5.5	2.5	11.0			
Barrel Style		Type No.	A	B	C	Quick Adapter Accessory	
			OD	ID	L		
   <p>(Straight)</p>  <p>(Right-angled)</p>	P2I	5.5	2.1	9.5	None		
	P2J	5.5	2.1	11.0			
	P2L	5.5	2.5	9.5			
	P2M	5.5	2.1	11.0			
	P2IR	5.5	2.5	9.5			
	P2JR	5.5	2.1	11.0			
	P2LR	5.5	2.5	9.5			
P2MR	5.5	2.5	11.0				
Lock Style		Type No.	A	B	C	Quick Adapter Accessory	
			OD	ID	L		
   <p>SWITCHCRAFT original or equivalent</p>	P2S(S761K)	5.53	2.03	12.06	None		
	P2K(761K)	5.53	2.54	12.06			
	P2C(S760K)	5.53	2.03	9.52			
	P2D(760K)	5.53	2.54	9.52			
Center Pin Style		Type No.	A	B	C	D	Quick Adapter Accessory
			OD	ID	L	Center Pin	
   <p>EIAJ equivalent</p>	P4A	5.5	3.4	11.0	1.0	Available (Current rating: 7.5A max.)	
	P4B	6.5	4.4	11.0	1.4		
	P4C	7.4	5.1	11.0	0.6		
Min. Pin Style		Type No.	A	B	C	Quick Adapter Accessory	
			OD	ID	L		
   <p>EIAJ equivalent</p>	P3A	2.35	0.7	11.0	Available (Current rating: 5A max.)		
	P3B	4.0	1.7	11.0			
	P3C	4.75	1.7	11.0			

YS200 SERIES

Optional DC plug: (Available in customized cable or quick adapter)

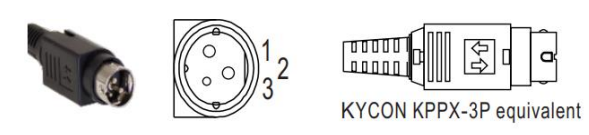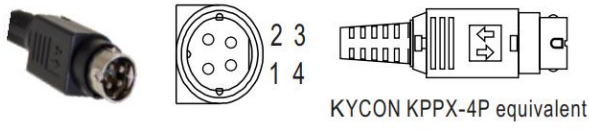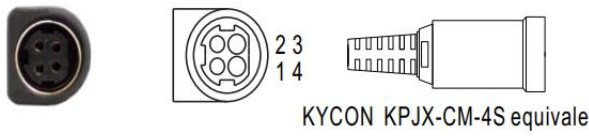Tuning Fork Style	Type No.	Pin Assignment		Quick Adapter Accessory
		PIN No.	Output	
 <p>KYCON KPPX-3P equivalent</p>	R6B	1	+Vo	Available (Current rating: 7.5A max.)
		2	-Vo	
		3	+Vo	
Barrel Style	Type No.	Pin Assignment		Available (Current rating: 7.5A max.)
 <p>KYCON KPPX-4P equivalent</p>	R7B	PIN No.	Output	
		1	+Vo	
		2	-Vo	
		3	-Vo	
		4	+Vo	
Lock Style	Type No.	Pin Assignment		None
 <p>KYCON KPJX-CM-4S equivalent</p>	R7BF	PIN No.	Output	
		1	+Vo	
		2	-Vo	
		3	-Vo	
		4	+Vo	
Center Pin Style	Type No.	Pin Assignment		Available (Current rating: 7.5A max.)
	R1B	PIN No.	Output	
		1	-Vo	
		2	-Vo	
		3	+Vo	
		4	-Vo	
		5	+Vo	
Center Pin Style	Type No.	Pin Assignment		None
	by customer	PIN No.	Output	
		1	+Vo	
		2	-Vo	