

YS16V SERIES



Input: 100-265VAC 50/60Hz

Output Voltage: 5V-36V DC

Rated Power: 18W max

Features

Universal AC input/ Full range

Energy efficiency level VI

Leakage Current: < 0.25mA

Extremely low leakage current

Protection: Over load/Over voltage/Short circuit

Withstand voltage : 3KV

Life Warranty: 3 years

Application

Digital equipment

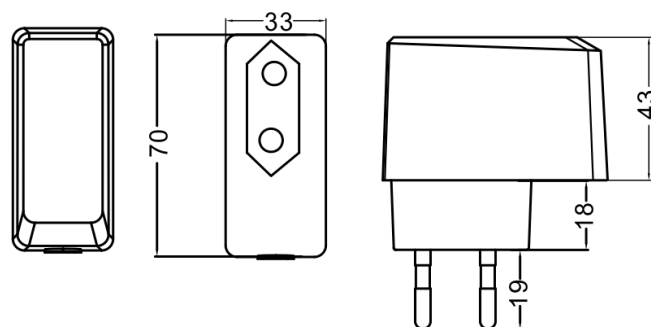
Electric curtains

Kitchen appliances


Household appliances



■ Dimensions and Installation



YS6V-E

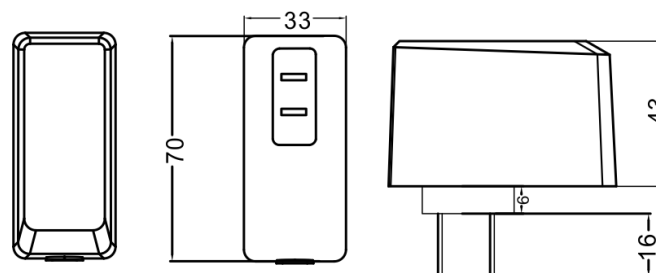


YS6V-U

YS16V SERIES


MODEL DETAIL SPEC.		YS16V-0503000	YS16V-0902000	YS16V-1201500	YS16V-1801000	YS16V-2400750	YS16V-3600500
INPUT	Input Voltage:	85-265VAC					
	Input Frequency:	50/60Hz					
	Inrush Current:	15A/115VAC 30A/230VAC					
	AC Current:	0.2A/115VAC 0.21A/230VAC					
	Leakage Current:	< 0.25mA/240VAC					
	Efficiency:	81.84%	86.52%	86.8%	86.33%	86.8%	86.33%
OUTPUT	DC Voltage:	5V	9V	12V	18V	24V	36V
	Rated Current:	3A	2A	1.5A	1A	0.75A	0.5A
	Rated Power:	15W	18W	18W	18W	18W	18W
	Voltage Tolerance:	±5.0%	±5.0%	±5.0%	±5.0%	±5.0%	±5.0%
	Ripple and Noise:	75mVp-p	90mVp-p	120mVp-p	180mVp-p	240mVp-p	300mVp-p
	Line Regulation:	±3%					
	Load Regulation:	±5%	±5%	±5%	±5%	±5%	±5%
	Setup, Rise, Hold Up time:	500ms, 30ms/120ms 230VAC 1000ms, 30ms/25ms 115VAC at full load					
ENVIRONMENTAL	Operating Temperature:	-20 ~ +60 (Refer to "Derating Curve")					
	Storage Temp:	-40°C ~ 85°C					
	Storage Humidity:	10 ~ 95% RH					
	Working Humidity:	20 ~ 95% RH non-condensing					
PROTECTION	Over Load:	Above 105% rated output power					
		Protection type: Hiccup mode, recovers automatically after fault condition is removed					
	Over Voltage:	5V:5.75~ 6.75V 9V:10.35~12.15V 12V:13.8 ~ 16.2V 18V:20.7~24.3V 24V:27.6 ~ 32.4V 36V:41.4~48.6V					
		Protection type: Shut down o/p voltage, re-power on to recover					
	Over Temperature:	Shut down o/p voltage, re-power on to recover					
SAFETY & EMC	Safety Regulations:	TUV BS EN/EN62368-1, EAC TP TC 004, BSMI CNS14336-1, AS/NZS 62368.1 approved					
	Withstand Voltage:	I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC					
	Isolation Resistance:	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C/ 70% RH					
	EMC Emission:	Compliance to BS EN/EN55032 (CISPR32), BS EN/EN61204-3 Class B, BS EN/EN61000-3-2,-3, EAC TP TC 020, CNS13438 Class B					
	EMC Immunity:	EN/EN61000-4-2,3,4,5,6,8,11					
OTHER	MTBF:	100Khrs min. MIL-HDBK-217F(25°C)					
	Size:	70*33*80mm					
	Weight:	120g / pcs					
	Packaging:	100PCS/CTN					

YS16V SERIES

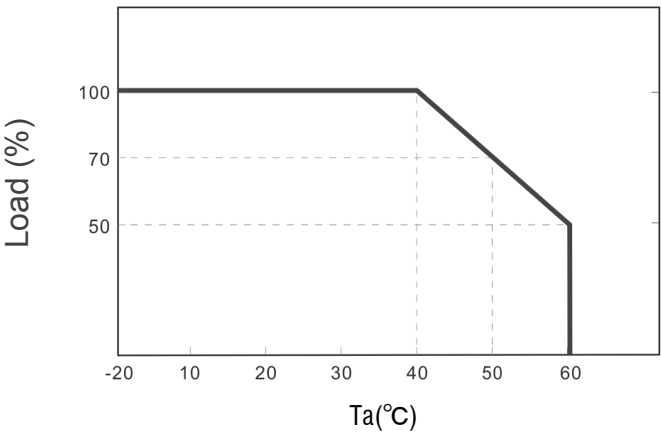Deduction curve and temperature




Minus output and input voltage curves

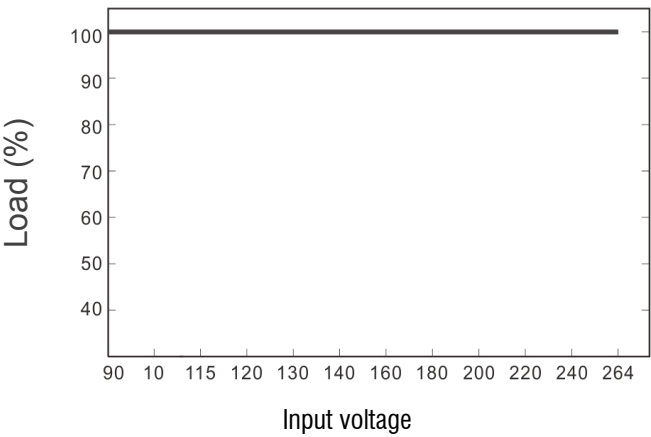

Functional Diagram

Standard plug: P1J

P1J	Pin Assignment
	
	Outside  Inside
	-V not connected to AC FG (standard)
	-V connected to AC FG (optional)









DC plug changeable through:

- (1) Customization of the standard part with an optional DC plug according to the table (MOQ applicable)
 - (2) Quick adapter accessory (sold separately without MOQ)
- Please refer to below table and online selection guide :

Example quick adapter accessory:




YS16V SERIES

Optional DC plug: (Available in customized cable or quick adapter)

Tuning Fork Style			Type No.	A	B	C	Quick Adapter Accessory	
				OD	ID	L		
 	 (Straight)	P1I	5.5	2.1	9.5	Available (Current rating: 7.5A max.)		
		P1L	5.5	2.5	9.5			
		P1M	5.5	2.1	11.0			
	 (Right-angled)	P1IR	5.5	2.5	9.5			
		P1JR	5.5	2.1	11.0			
		P1LR	5.5	2.5	9.5			
		P1MR	5.5	2.5	11.0			
Barrel Style			Type No.	A	B	C	Quick Adapter Accessory	
				OD	ID	L		
 	 (Straight)	P2I	5.5	2.1	9.5	None		
		P2J	5.5	2.1	11.0			
		P2L	5.5	2.5	9.5			
		P2M	5.5	2.1	11.0			
	 (Right-angled)	P2IR	5.5	2.5	9.5			
		P2JR	5.5	2.1	11.0			
		P2LR	5.5	2.5	9.5			
		P2MR	5.5	2.5	11.0			
Lock Style			Type No.	A	B	C		
				OD	ID	L		
  	P2S(S761K)		5.53	2.03	12.06	None		
	P2K(761K)		5.53	2.54	12.06			
	P2C(S760K)		5.53	2.03	9.52			
	P2D(760K)		5.53	2.54	9.52			
Center Pin Style			Type No.	A	B	C	D	Available (Current rating: 7.5A max.)
				OD	ID	L	Center Pin	
   EIAJ equivalent	P4A		5.5	3.4	11.0	1.0		
	P4B		6.5	4.4	11.0	1.4		
	P4C		7.4	5.1	11.0	0.6		
Min. Pin Style			Type No.	A	B	C	Available (Current rating: 5A max.)	
				OD	ID	L		
   EIAJ equivalent	P3A		2.35	0.7	11.0			
	P3B		4.0	1.7	11.0			
	P3C		4.75	1.7	11.0			

YS16V SERIES

Optional DC plug: (Available in customized cable or quick adapter)

Tuning Fork Style	Type No.	Pin Assignment		Quick Adapter Accessory
		PIN No.	Output	
   KYCON KPPX-3P equivalent	R6B	1	+Vo	Available (Current rating: 7.5A max.)
		2	-Vo	
		3	+Vo	
Barrel Style	Type No.	Pin Assignment		
		PIN No.	Output	
   KYCON KPPX-4P equivalent	R7B	PIN No.	Output	Available (Current rating: 7.5A max.)
		1	+Vo	
		2	-Vo	
		3	-Vo	
		4	+Vo	
Lock Style	Type No.	Pin Assignment		
		PIN No.	Output	
   KYCON KPJX-CM-4S equivalent	R7BF	PIN No.	Output	None
		1	+Vo	
		2	-Vo	
		3	-Vo	
		4	+Vo	
Center Pin Style	Type No.	Pin Assignment		
		PIN No.	Output	
  	R1B	PIN No.	Output	Available (Current rating: 7.5A max.)
		1	-Vo	
		2	-Vo	
		3	+Vo	
		4	-Vo	
		5	+Vo	
Center Pin Style	Type No.	Pin Assignment		
		PIN No.	Output	
  	by customer	1	+Vo	None
		2	-Vo	